

# Jockey Pump Controller

Full voltage across the line starter  
Solid State Controls with Digital

**iPD+** Operator Interface

## Standard Features:

- Solid state controls with digital *iPD+* operator interface
- All adjustments on door front
- Visual indicators
  - Manual motor run
  - Automatic motor run
  - System pressure
  - Automatic mode
  - Off mode
  - Motor overload
  - Pump start counter
  - Elapsed time meter (hours / non-resettable)
- Timers
  - Minimum run period timer
  - Sequential start timer
- Operators
  - OFF-AUTO pushbutton
  - Start and stop pushbuttons
- NEMA 2 enclosure
- Pressure transducer
- Fuseless magnetic motor starter

The model JP jockey pump controllers are specifically designed to control jockey pumps in order to maintain the desired water pressure in fire pump serviced systems. A jockey pump installation prevents unnecessary starting of the fire pump due to small leaks in the sprinkler system piping.

The model JP jockey pump controller is supplied with the front door mounted, solid state controls with digital *iPD+* operator interface. The *iPD+* allows the user to set and adjust all parameters required such as start and stop pressures, ON or OFF timers and units of measure (psi, bar, kPA, feet of head, meter of head) without having to open the controller door. The *iPD+* also continuously displays the system pressure and the start and stop pressure settings. LED visual indications include manual motor run, automatic motor run, system pressure above stop pressure setting, system pressure in-between start and stop pressure setting and system pressure below start pressure setting.



The standard power circuit consists of a horsepower rated disconnect switch, a thermo-magnetic motor protector and a motor contactor for across the line full voltage starting. Consult factory for other types of motor protection or starting methods available.


Individual models are specific to the voltage available on site:

- JP1: 120 V / Hp (kW) / single phase / 60Hz
- JP2: 220 to 240 V / Hp (kW) / single phase / 50 or 60Hz
- JP3: 208 to 600 V / Hp (kW) / three phase / 50 or 60Hz



OPTIONAL

ICC-ES AC156  
IBC 2015  
CBC 2013

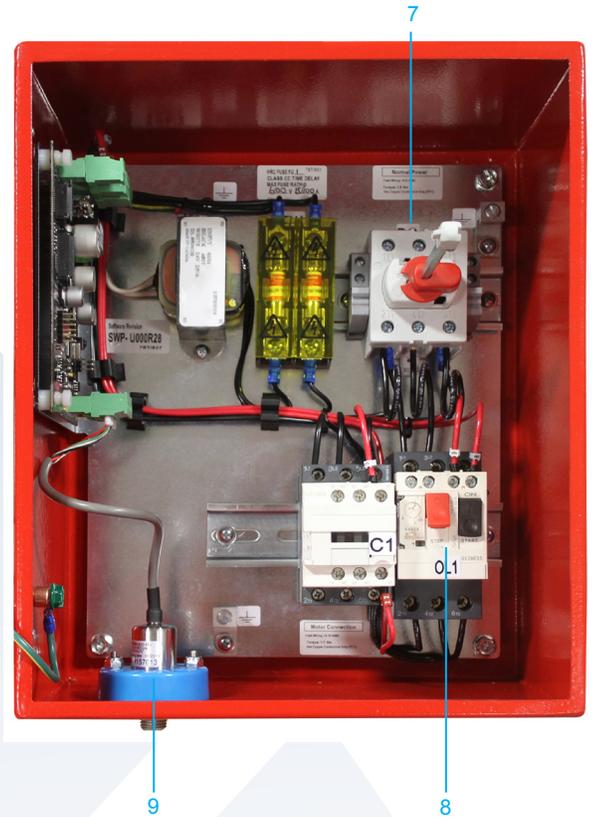

- 1 - High luminosity four digit digital display
- 2 - System status diagnostic LED's for:
  - i. Green: system pressure at or above cut-out value
  - ii. Yellow: system pressure between cut-in and cut-out
  - iii. Red: system pressure at or below cut-in value
- 3 - Motor run LEDs (manual start or automatic start)
- 4 - Start and stop pushbuttons
- 5 - Navigation keypad

- 6 - OFF-AUTO position pushbutton and visual indication (LED)
- 7 - Horsepower rated door interlocked rotary type disconnect switch
- 8 - Fuseless magnetic motor starter with thermo-magnetic motor protector and horsepower rated contactor
- 9 - Pressure transducer with 0-600psi range and stainless steel construction

**HOW TO ORDER:** JPx - V / HP / Ph / Hz  
 Ex.: JP3 - 208 / 2 / 3 / 60

## Americas

**Tornatech Inc.**  
**Head Office**  
 7075, Pl. Robert-Joncas  
 Suite # 132  
 Montreal, Canada  
 H4M 2Z2  
 Tel.: + 1 514 334 0523  
 + 1 800 363 8448  
 Fax: + 1 514 334 5448

**USA Sales Representatives**  
 Toll Free: + 1 800 363-8448  
**Cincinnati, Ohio**  
 Cell: + 1 513 307 6766  
**Birmingham, Alabama**  
 Cell: + 1 205 902 9331  
**Latin America Sales Representative**  
 Tel.: + 1 514 334 0523  
 Cell: + 1 514 945 4067

## Europe

**Tornatech S.P.R.L.**  
 Avenue Sabin 3  
 1300 Wavre  
 Belgium  
 Tel.: + 32 (0) 10 84 40 01  
 Fax: + 32 (0) 10 24 75 05

## Middle East

**Tornatech FZE**  
 Warehouse RA08CC04  
 Jebel Ali North  
 PO Box 18435  
 Dubai,  
 United Arab Emirates  
 Tel.: + 971 (0)4 887 0615  
 Fax.: + 971 (0)4 887 0604

## Asia

**Tornatech Pte Ltd.**  
 3 Soon Lee Street #05-33  
 Pioneer Junction  
 Singapore 627606  
 Tel.: + 65 6795 8114  
 + 65 6795 7823  
 Fax: + 65 6795 3201