




## MICRO DIAPHRAGM GAS SAMPLING PUMPS

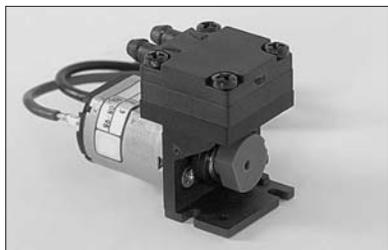

**NMP 05 S**

### Concept

The Micro Diaphragm Gas Sampling Pumps from KNF are based on a simple principal - an elastic diaphragm, fixed on its edge, moves up and down its central point by means of an eccentric. In this way the medium is transferred using automatic valves.

The new range of KNF Micro Pumps is for the first time equipped with the patented stress-optimised structured diaphragm, resulting in a high pneumatic performance, a durable product and compact size. New, very efficient valves and sealing systems as well as the precise placement of the pump head are some of the other technical features we can offer.

For pump drive we provide a selection of dc motors with various levels of performance, durability and price.



**NMP 09 M**

### Features

#### Uncontaminated flow

No contamination of the media due to oil-free operation

#### Maintenance-free

#### Compact size

due to structured diaphragm

#### High pneumatic performance

because of structured diaphragm

#### High level of gas tightness

thanks to the closed diaphragm surface and special sealing system

#### Low aerodynamic loss

by means of a new valve system

#### Long product life

thanks to structured diaphragm

#### Ready for assembly

Can operate in any installed position

For the version with brushless motor the following also apply:

- no sparks
- safe and reliable constant use
- particularly long durability



**NMP 015 B**

### Areas of use

KNF Micro Diaphragm Pumps are used frequently in the fields of analysis and medicine.

For instance as pumps for gas measurement, for example for sampling environmental conditions in the workplace, or for exhaust gas and smoke analysis or built into machines for measuring blood pressure.

As they are dc driven, the micro diaphragm pumps are suited for use in portable and stand-alone equipment.

## PERFORMANCE DATA

Type	Delivery (l/min)	Vacuum (mbar absolute)	atm. Press.	Pressure (bar g)	Weight (g)
NMP 05 S (Standard dc motor, 5 V)	0.40	500		0.15	18.0
NMP 05 M (dc motor with iron-free rotor, 6 V)	0.40	500		0.15	19.5
NMP 05 L (dc motor with iron-free rotor, longlife)	0.45	500		0.25	27.0
NMP 05 B (brushless dc motor)	0.30	500		0.4	22.0
NMP 09 S (Standard dc motor)	0.75	550		0.15	19.5
NMP 09 M (dc motor with iron-free rotor)	0.85	500		0.15	22.5
NMP 09 L (dc motor with iron-free rotor, longlife)	0.85	500		0.25	29.5
NMP 09 B (brushless dc motor)	0.75	500		0.65	24.5
NMP 015 S (Standard dc motor)	1,4	400		0,9	44.0
NMP 015 M (dc motor with iron-free rotor)	1,6	400		0,9	65.0
NMP 015 L (dc motor with iron-free rotor, longlife)	1,4	400		0,9	47.0
NMP 015 B (brushless dc motor)	1.3	400		0,9	55.0





# NMP 015 S NMP 015 M

## PERFORMANCE DATA

Type and Order No. <sup>2)</sup>	DC Motor (V)	Delivery at atm. pressure (l/min) <sup>1)</sup>	Max. operating pressure (mbar)	Ultimate vacuum (mbar abs.)	Ultimate pressure (bar g)
NMP 015 S	3.5	1.4	±200	400	0.9
NMP 015 S	6	1.4	±200	400	0.9
NMP 015 M *	6	1.5	±200	400	0.9
NMP 015 M *	12	1.6	±200	400	0.9





<sup>1)</sup> Litre at STP

<sup>\*)</sup> Correspond with the EC directive concerning electro-magnetical compatibility 2004/108/EC.

<sup>2)</sup> „DRIVE OPTIONS“ (DC Motor Version) and „MODEL CODE EASY ORDERING“; see the next page.

## MODEL CODES AND MATERIALS

Pump head	Diaphragm	Valves
PPS	EPDM	EPDM

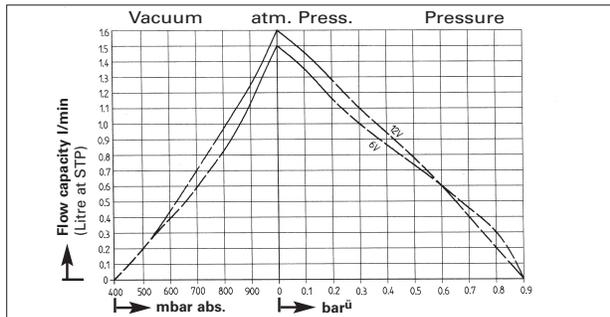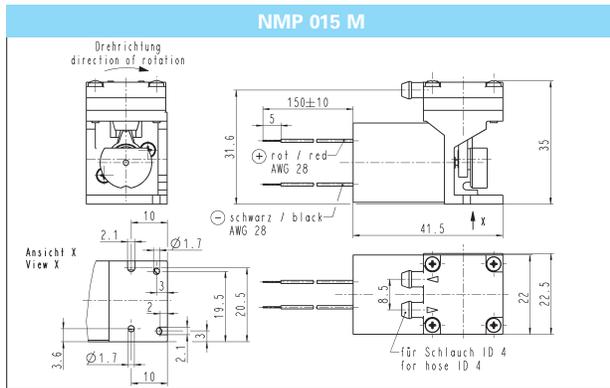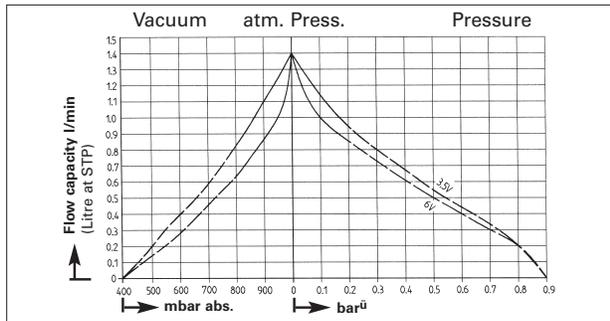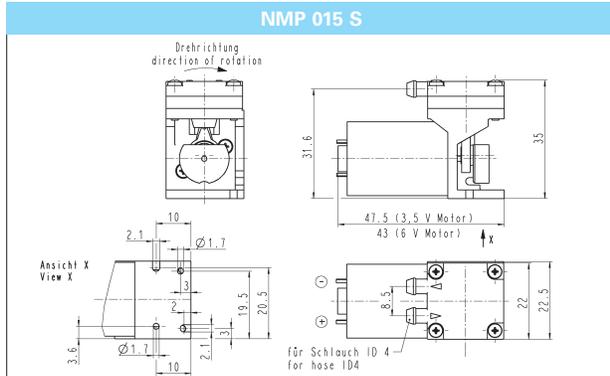

# NMP 015 L NMP 015 B

## PERFORMANCE DATA

Type and Order No. <sup>2)</sup>	DC Motor (V)	Delivery at atm. pressure (l/min) <sup>1)</sup>	Max. operating pressure (mbar)	Ultimate vacuum (mbar abs.)	Ultimate pressure (bar g)
NMP 015 L *	3.5	1.3	±250	400	0.9
NMP 015 L *	6	1.4	±250	400	0.9





## PERFORMANCE DATA (version with brushless dc motor)

Type and Order No. <sup>2)</sup>	DC Motor (V)	Delivery at atm. pressure (l/min) <sup>1)</sup>	Ultimate vacuum (mbar abs.)	Ultimate pressure (bar g)
NMP 015 B	6	1.3	400	0.9
NMP 015 B	12	1.3	400	0.9

Caution! Incorrect lead connection will damage motor electronics!

## MODEL CODES AND MATERIALS

Pump head	Diaphragm	Valves
PPS	EPDM	EPDM

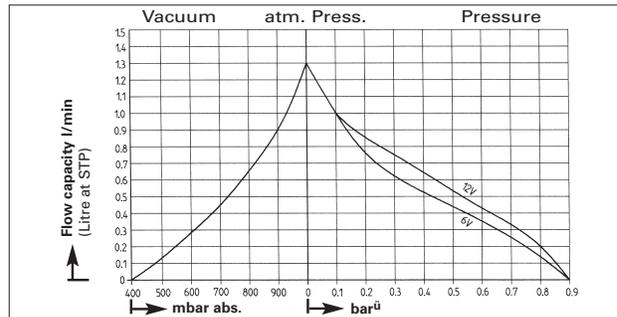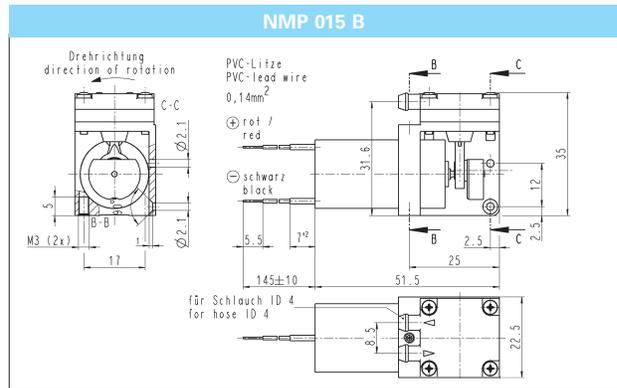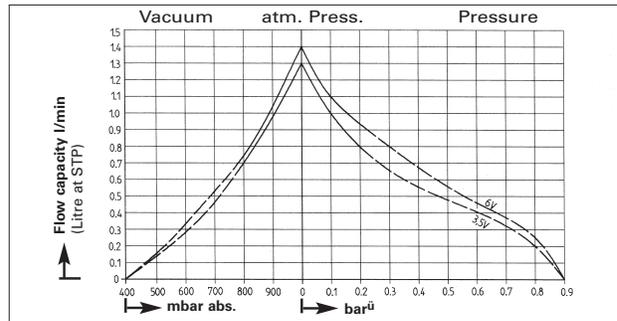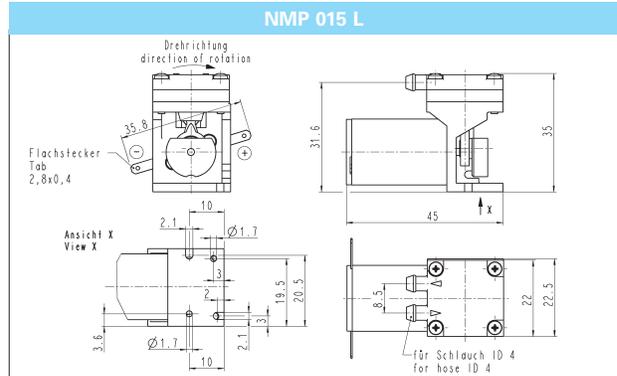

# TECHNICAL INFORMATION

## MICRO DIAPHRAGM GAS SAMPLING PUMPS WITH THE WORLD SMALLEST STRUCTURED DIAPHRAGM!



## TECHNICAL DETAILS

Maximum permissible gas and ambient temperature: between +5°C and +40°C.

Motors with other voltages on request.

Hints on function and installation: see back side.

## MODEL CODE FOR EASY ORDERING

The model code is identical to the order number. It is made up as follows:



- Base model
- DC motor - drive option
- Other motor data eg.:

## DRIVE OPTIONS

Our Micro Diaphragm Pumps are available with a choice of four different drive motors.

### S - Standard

The pump is equipped with a standard dc motor.

### M - DC motor with iron-free rotor

The pump is equipped with a dc motor with an iron-free rotor. It provides a higher level of performance than the S version and is ideal for more demanding operations.

### L - DC motor with iron-free rotor

The pump is equipped with a dc motor which is based on the same technology as the M model but is even more robust and durable. This drive is ideal for higher operational.

### B - brushless DC motor

The pump is equipped with a brushless electronically commutated dc motor (electronics integrated in motor). The motor runs vibration and spark free, almost silently, is very dynamic and extremely durable. This model can be used permanently at all pressure levels.

In our extensive program you are sure to find the pump you need for your particular application.

KNF - the competent partner for vacuum and compressor technology, especially for unusual problems. Call us and talk to our application engineers.


The models **M**, **L** and **B** pass the EU guideline **2004/108/EC** (without NMP 015 B).

## HINTS ON FUNCTION AND INSTALLATION

### FUNCTION OF KNF MICRO DIAPHRAGM GAS SAMPLING PUMPS

An elastic diaphragm is moved up and down by an eccentric (see illustration). On the down-stroke it draws the air or gas being handled through the inlet valve. On the up-stroke the diaphragm forces the medium through the exhaust valve and out of the head. The compression chamber is hermetically separated from the drive mechanism by the diaphragm. The pumps transfer, evacuate and compress completely oil-free.

#### Diaphragm pump

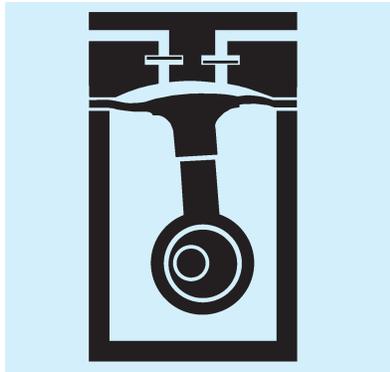

### HINTS ON INSTALLATION AND OPERATION

- Range of use: Transferring air and gases at temperatures between + 5 °C and + 40 °C.
- Please check the compatibility of the materials of the pump head, diaphragm and valves with the medium.
- The KNF product line contains pumps suitable for pumping aggressive gases and vapors - please contact us.
- Permissible ambient temperature: between + 5 °C and + 40 °C.
- The standard pumps are not suitable for use in areas where there is a risk of explosion. In these cases there are other products in the KNF program - please ask us for details.
- The pumps are not designed to start against pressure or vacuum; when a pump is switched on the pressure in the suction and pressure lines must be atmospheric. Pumps that start against pressure or vacuum are available on request.
- To prevent the maximum operating pressure being exceeded, restriction or regulation of the air flow should only be carried out in the suction line.
- For the version with brushless motor the following also apply:  
Caution! Incorrect lead connection will damage motor electronics!

- Components connected to the pump must be designed to withstand the pneumatic performance of the pump.
- Fit the pump at the highest point in the system, so that condensate cannot collect in the head of the pump - that prolongs working-life.

If you have any questions, please call our application engineers (see below for contact telephone number).

#### KNF Neuberger, Inc.

Two Black Forest Road  
Trenton, NJ 08691-1810  
Tel. 609-890-8600  
Fax 609-890-8323  
[www.knfusa.com](http://www.knfusa.com)



## The KNF-Group worldwide

### Germany

#### KNF Neuberger GmbH

Alter Weg 3  
D-79112 Freiburg  
Tel. +49 7664 5909 0  
Fax +49 7664 5909 99  
info@knf.de  
www.knf.de

### Benelux Netherlands

#### KNF Verder B.V.

Utrechtseweg 4a  
NL-3451 GG Vleuten  
Tel. +31 30 677 92 40  
Fax +31 30 677 92 47  
info@knf-verder.nl  
www.knf-verder.nl

### Benelux Belgium and Luxembourg

#### KNF Verder N.V.

Kontichsesteenweg 17  
B-2630 Aartselaar  
Tel. +32 3 871 96 24  
Fax +32 3 871 96 28  
info@knf.be  
www.knf.be

### China

#### KNF Neuberger Trading

(Shanghai) Co., Ltd.  
No. 36 Lane 1000  
Zhang Heng Road  
Shanghai 201203  
Tel. +86 21 6859 6566  
Fax +86 21 6859 6568  
info@knf.com.cn  
www.knf.com.cn

### France,

### Marocco, Tunisia, Algeria

#### KNF Neuberger S.A.

4, Bld. d'Alsace Z.I.  
F-68128 Village-Neuf  
Tel. +33 389 70 35 00  
Fax +33 389 69 92 52  
info@knf.fr  
www.knf.fr

### United Kingdom

#### KNF Neuberger U.K., Ltd.

Avenue 2, Station Lane  
Industrial Estate  
Witney, Oxfordshire OX28 4FA  
Tel. +44 1993 77 83 73  
Fax +44 1993 77 51 48  
info@knf.co.uk  
www.knf.co.uk

### India

#### KNF Pumps + Systems (India) Pvt. Ltd.

RAJIV GANDHI INFOTECH PARK,  
Phase 1,  
Ganga Estate, Survey No. 152/2/2,  
Above AXIS BANK,  
Hinjewadi, Pune 411 057  
Tel. +91 20 640 13 923  
+91 20 640 08 923  
Fax +91 20 229 33 923  
info@knfpumps.in  
www.knfpumps.in

### Italy

#### KNF ITALIA S.r.l.

Via Flumendosa, 10  
I-20132 Milano  
Tel. +39 02 272 03 860  
Fax +39 02 272 03 848  
info@knf.it  
www.knf.it

### Japan

#### KNF Japan Co.Ltd.

Across Shinkawa Bldg. Annex 3F,  
1-16-14 Shinkawa, Chuo-ku,  
Tokyo 104-0033  
Tel. +81 3 3551 7931  
Fax +81 3 3551 7932  
info@knf.co.jp  
www.knf.co.jp

### Korea

#### KNF Neuberger Ltd.

Woosan Bldg.Rm#202  
336-4, Hwikyung-Dong  
Dongdaemun-Ku  
130-090, Seoul  
Tel. +82 2 959 0255  
Fax +82 2 959 0254  
knf@knfkorea.com  
www.knfkorea.com

### Sweden, Finland, Denmark, Norway

#### KNF Neuberger AB

Mejerivägen 4  
P.O. Box 44060  
SE-10073 Stockholm  
Tel. +46 8 744 51 13  
Fax +46 8 744 51 17  
info@knf.se  
www.knf.se

### Switzerland Sales

#### KNF Neuberger AG

Stockenstrasse 6  
CH-8362 Balterswil  
Tel. +41 71 973 99 30  
Fax +41 71 973 99 31  
knf@knf.ch  
www.knf.ch

### Switzerland

#### Production Liquid Pumps

**KNF FLODOS AG**  
Wassermatte 2  
CH-6210 Sursee  
Tel. +41 41 925 00 25  
Fax +41 41 925 00 37  
info@knf-flodos.ch  
www.knf-flodos.ch

### Switzerland

#### Production Micro Pumps

**KNF Micro AG**  
Zelglimatte 1b  
CH-6260 Reiden  
Tel. +41 62 787 88 88  
Fax +41 62 787 88 99  
info@knf-micro.ch  
www.knf-micro.ch

### Taiwan

#### KNF Neuberger Ltd.

9F-2, No. 24, Lane 123, Section 6,  
Min Chuan East Road  
Neihu District  
Taipei City, 11490  
Tel. +886 2 2794 1011  
Fax +886 2 8792 1648  
knftwn@knftwn.com.tw  
www.knftwn.com.tw

### USA, Canada, South America

#### KNF Neuberger, Inc.

Two Black Forest Road  
Trenton, New Jersey 08691-1810  
Tel. +1 609 890 8600  
Fax +1 609 890 8323  
knfusa@knf.com  
www.knfusa.com  
**Latin America**  
Tel. +1 609 649 1010  
gb@knf.com

## Diaphragm Pumps + Systems



KNF Neuberger GmbH



KNF Neuberger, INC.



KNF Micro AG



KNF Neuberger S.A.



KNF FLODOS AG

## The KNF-Production worldwide

### Germany

#### KNF Neuberger GmbH

Freiburg-Munzingen

### France

#### KNF Neuberger S.A.

Village-Neuf

### Switzerland

#### KNF FLODOS AG

Sursee

### Switzerland

#### KNF Micro AG

Reiden

### USA

#### KNF Neuberger, Inc.

Trenton - New Jersey