

Trimod Besta

Trimod Besta Füllstandscharter

Trimod Besta Level Switch

Trimod Besta Contrôleur de niveau

Safety Integrity Level:	SIL 1 (SIL 3 capable)
-------------------------	--

Dimensionen / Dimensions mm	
-----------------------------	--

[illegible]

Ship register certificate:

ABS, BV, DNV-GL, LR, RINA, RS, ClassNK

Überwurfflansch

Slip-on flange

Bride folle

Schmelze / Heat no:

Bachofen-Nr. / Bachofen no:

Dichteinheit / Fixflansch

Sealing unit / Fixed flange	1.4408
-----------------------------	--------

Unité d'étanchéité / Bride fixe

Schmelze / Heat no:

Bachofen-Nr. / Bachofen no:

Schwimmer

Float	1.4571
-------	--------


Flotteur

Order no.

Stk./ pcs./quant.

Date/Visa	20.10.17 / SIA
-----------	----------------

BACHOFEN
INDUSTRIELLE AUTOMATION

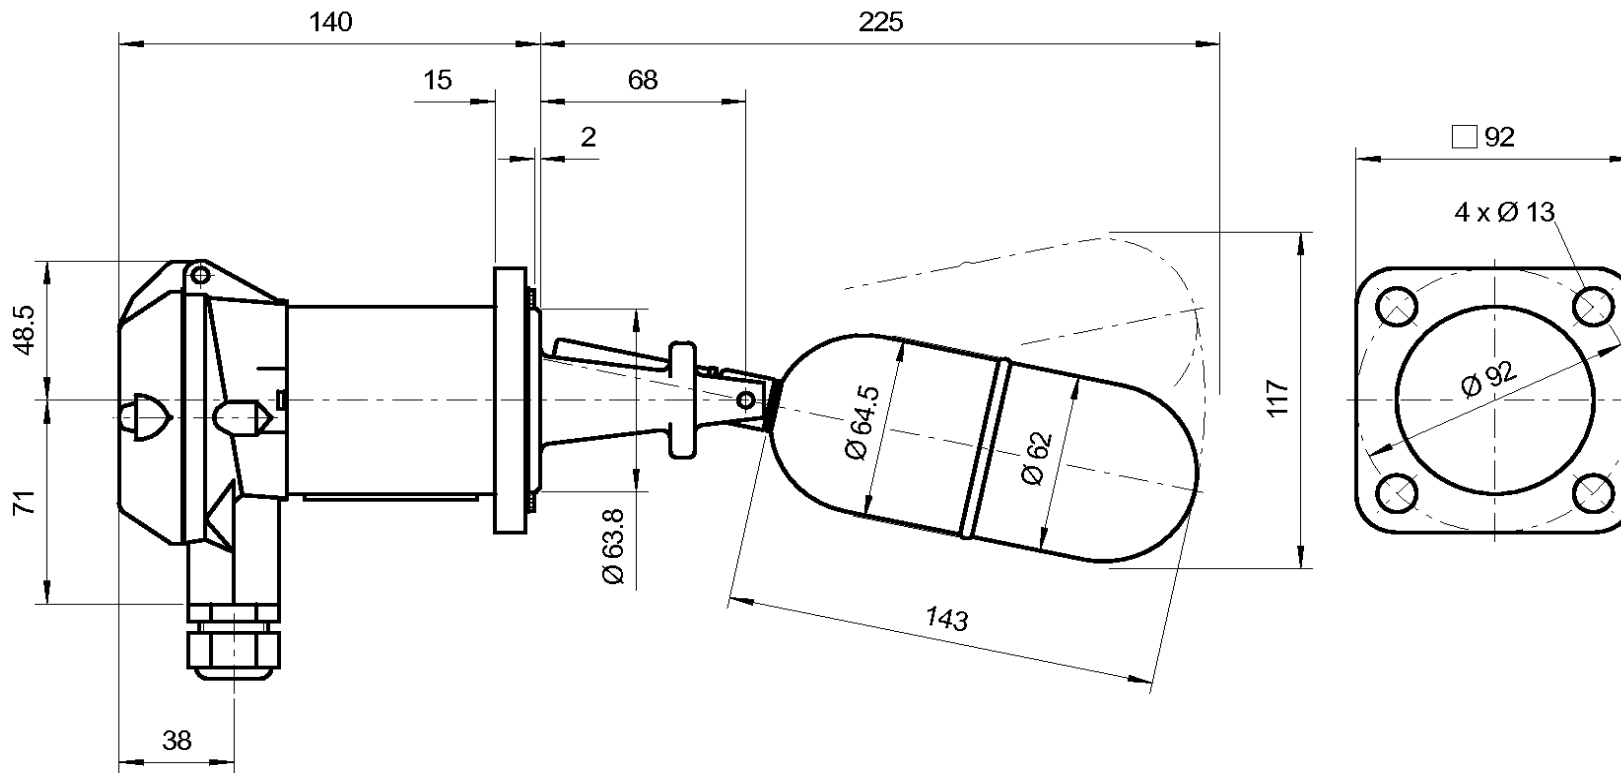

Type	Schaltmodul	Flanschmodul	Schwimmermodul
Type A 01 04	Switch module A	Flange module 01	Float module 04
Type (Art. no. A415604)	Module de commande	Module de bride	Module de flotteur
Betriebstemperatur	Gehäusematerial	Nenndruck / -weite	Schalt Differenz
Operating temp. 0 to 300°C	Housing material Aluminium	Nom. Pressure / -Diameter PN 25	Operating diff. 12 mm
Temp. de service	Matériau boîtier Sea water resistant	Pression- / Section Nominal	Différentiel
Umgebungstemp.	Kabeleinführung	Norm	Dichte min.
Ambient temp. 0 to 70°C	Cable entry M20 x 1.5	Standard Besta	Density min. 0.700 kg/dm³
Temp. d'ambiance	Presse-étoupe	Norme	Densité min.
Schaltleistung	Schutzart	Dichtungsart	Nenn- / Prüfdruck
Switch rating 5A / 250VAC	Enclosure IP65	Flange Facing Raised face	Nominal / Test press. PN 25 bar PP 38 bar
Pouvoir de coupure 5A / 30VDC	Cl. de protection	Type d'étanchéité	Pression nominal / d'épreuve