

FEELUX

## DIVA 2 Spot

LED for Kitchen cabinet, Displays & Furniture

Recessed & surface mount LED puck.





### Product Features

- Linkable together and with Feelux Diva 2 linear LED
- Single 4W diode eliminates multiple shadows
- Virtually no heat emission and no UV radiation
- Available in silver, gold, white, black
- Friction fit in slim pocket with mounting spring option
- To be used with constant voltage DC 24V driver
- Dimmable with available accessories


### Specification

- Voltage : DC 24V
- Operating temperature : 0~45° C
- Lamp life : 40,000hr/70%
- Available color : 3000K, 4000K, 6000K
- Color rendering : Ra>80
- Energy efficiency : 80 lm/W
- Degree of protection IP20
- Total energy consumption of 4.3W




Various color



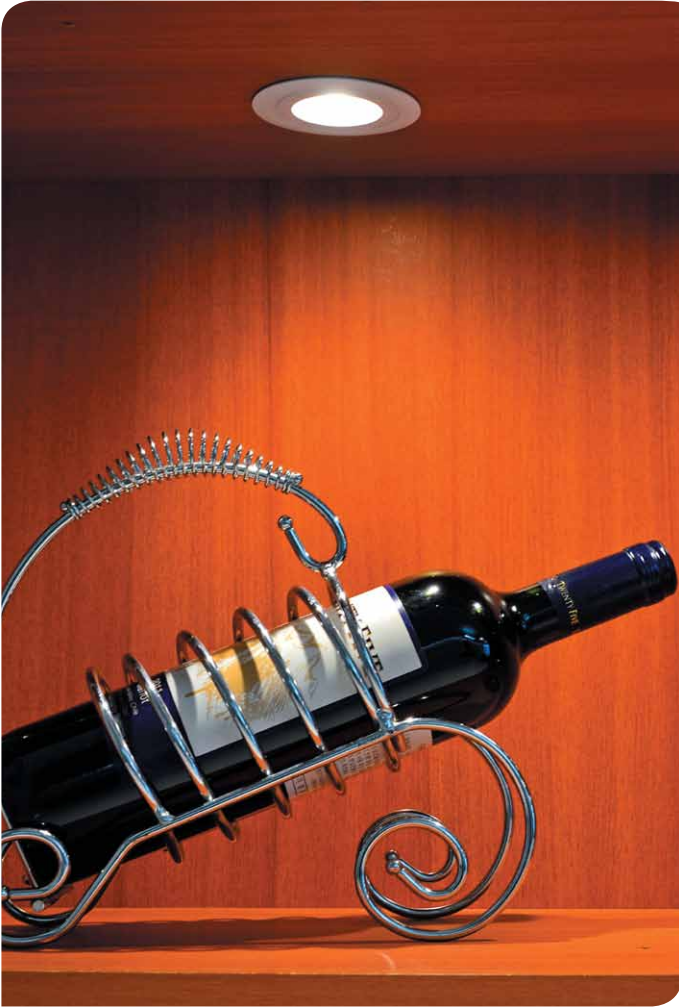


## Dimension

### Type A (Linkable)

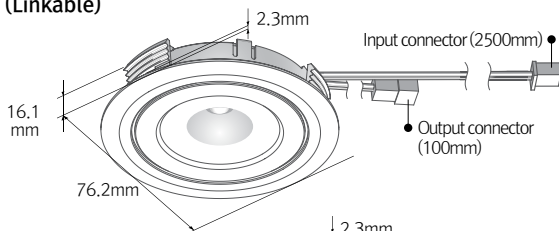

### Type B (End unit)

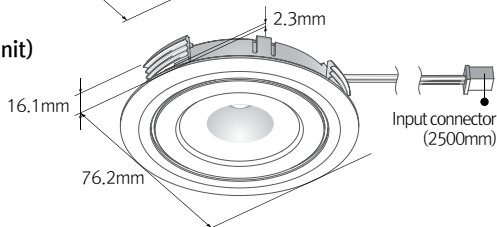


## Max. connection of linked fixtures

- DIVA2 SPOT : Max 7pcs in a row
- LED Driver


Model Name	Max. units for Led driver		
	24V / 15W	24V / 30W	24V / 75W
DVS4A4B24W	4	7	18
DVS4B4B24W	4	7	18

## Installation


### Linkable between Diva2 Spot & Diva2 Spot (Type A)




### Linkable between Diva2 Spot & Diva2 (Type A)




### Linkable between Diva2 & Diva2 Spot (Type A)




### End Unit (Type B)




### Hole Diameter



### Mounting spring installation

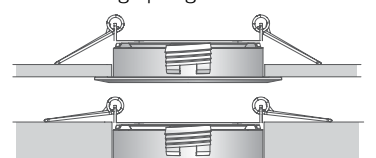

**Single diode without multiple shadow**

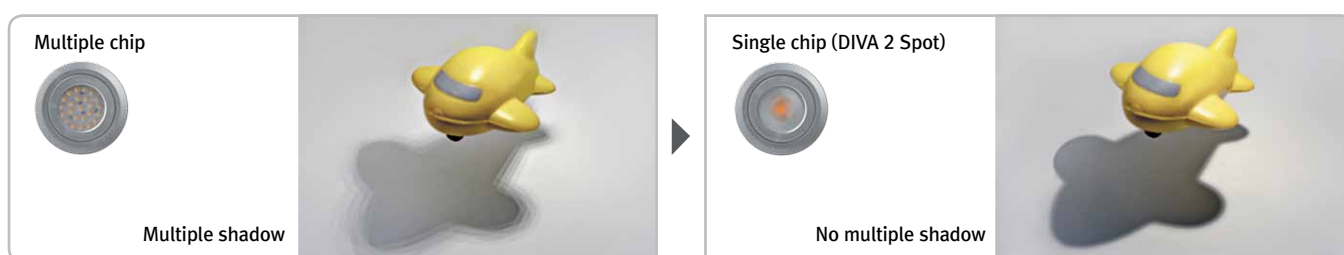

**Accessories**

**a) Diva2 spot linkable type**

White	Black	Gold	Silver
DVS4A4B24W	DVS4A4B24B	DVS4A4B24G	DVS4A4B24S

**b) Diva2 spot end unit type**

White	Black	Gold	Silver
DVS4B4B24W	DVS4B4B24B	DVS4B4B24G	DVS4B4B24S

**c) Extension cable (Between Diva2 Spot & Diva2 Spot or 6 way distributor)**

DVS cable(A) : 2,500mm

**d) Connecting cable (Between Diva2 Spot & Diva2)**

DVS cable(B) : 1,000mm

**e) Connecting cable(Between Diva2 & Diva2 Spot)**

NDVPC : 2500mm

**f) Dimming Interface (1-10V) : FLD-V10 (Max.48W)**

: FDC-L10 (Max.100W)

**g) Mounting spring: DVS spring**

**h) LED Driver with 6way distributor**

Part No	FLC15-24V/T	FLC30-24V/T	FLC75-24V/ T
Capacity	15W 24V	30W 24V	75W 24V

**i) Surface mount ring**

White	Black	Gold	Silver
DVS MR-WT	DVS MR-BK	DVS MR-GD	DVS MR-SV

**ii) Deco Ring**

White	Black	Gold	Silver
DVS DR-WT	DVS DR-BK	DVS DR-GD	DVS DR-SV

