| 変更履歴 REMARKS | | | | |
|---|---|---|---|---|
| 符号 SYM | 変更管理番号 REVISIONS | 日付 DATE | 担当 SIGN | 承認 APPROVED |
| 3 | 96062801 | H8.6.28 | H.M | K.I |
| 2 | 00072401 | H12.7.24 | Y.I | K.I |
| 1 | 02102201 | H14.10.22 | M.Y | T.T |




Z-Z SECTION







Y-Y SECTION

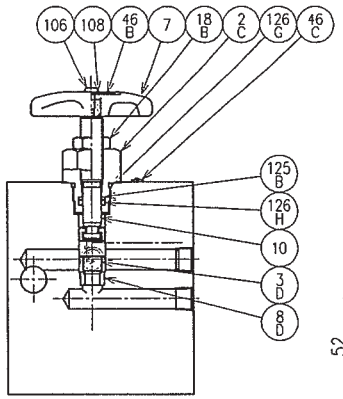


SYMBOL

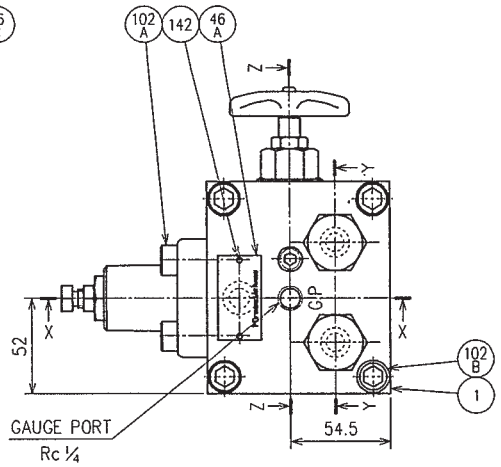


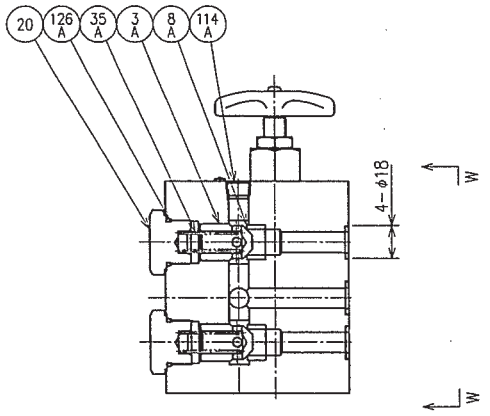X-X SECTION




NOTES

| | |
|---|---|
| 1. ALLOWABLE MAX WORKING PRESS | 32 MPa |
| 2. ALLOWABEL FLOW | 100 L/min |
| 3. MASS | 8.8 kg |
| 4. CHECK VALVE CRACKING PRESSURE | 0.005 MPa |
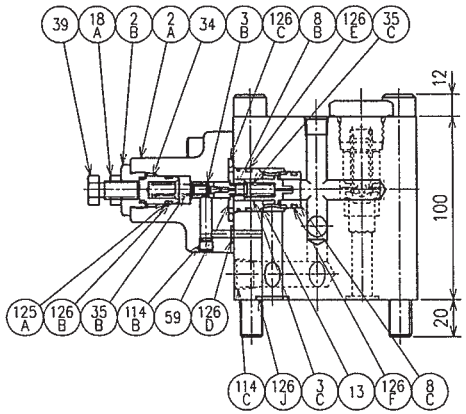
| 142 | RIVET | SWRM12 | 4 | |
|---|---|---|---|---|
| 126J | O-RING | NITRILE RUBBER | 4 | JIS B 2401 1B P14 |
| 126H | O-RING | NITRILE RUBBER | 1 | JIS B 2401 1A P10A |
| 126G | O-RING | NITRILE RUBBER | 1 | JIS B 2401 1B P18 |
| 126F | O-RING | NITRILE RUBBER | 1 | JIS B 2401 1B P16 |
| 126E | O-RING | NITRILE RUBBER | 1 | JIS B 2401 1B P20 |
| 126D | O-RING | NITRILE RUBBER | 1 | JIS B 2401 1B P6 |
| 126C | O-RING | NITRILE RUBBER | 1 | JIS B 2401 1B P28 |
| 126B | O-RING | NITRILE RUBBER | 1 | JASO F 404 Hs 70 1012 |
| 126A | O-RING | NITRILE RUBBER | 2 | JIS B 2401 1B P21 |
| 125B | BACK-UP RING | TEFLON | 1 | JIS B 2407 T2 P10A |
| 125A | BACK-UP RING | TEFLON | 1 | JASO F 404 1012 |
| 114C | SOCKET PLUG | S45C | 1 | |
| 114B | SOCKET PLUG | S45C | 1 | |
| 114A | SOCKET PLUG | S45C | 2 | |
| 108 | TOOTHED LOCK WASHER | SK5M | 1 | |
| 106 | CROSS-RECESSED HEAD MACHINE SCREW | SWRM12 | 1 | |
| 102B | HEXAGON SOCKET HEAD BOLT | SCM435 | 4 | M12×120 |
| 102A | HEXAGON SOCKET HEAD BOLT | SCM435 | 4 | |
| 59 | STOPPER | SS400 | 1 | |
| 46C | INDICAT PLATE | A5052P | 1 | |
| 46B | INDICAT PLATE | A5052P | 1 | |
| 46A | NAME PLATE | A5052P | 1 | |
| 39 | ADJUST BOLT | S45C | 1 | |
| 35C | SPRING | SWPB | 1 | |
| 35B | SPRING | SWPB | 1 | |
| 35A | SPRING | SWPA | 2 | |
| 34 | SPRING HOLDER | S45C | 1 | |
| 20 | PLUG | S45C | 2 | |
| 18B | LOCK NUT | S45C | 1 | |
| 18A | LOCK NUT | S45C | 1 | |
| 13 | BUSH | S15C | 1 | |
| 10 | STEM | SCM435 | 1 | |
| 8D | SEAT RING | SCM435 | 1 | |
| 8C | SEAT RING | SCM435 | 1 | |
| 8B | SEAT RING | SCM440 | 1 | |
| 8A | SEAT RING | SCM435 | 2 | |
| 7 | HANDLE | FC200 | 1 | |
| 3D | DISC | S45C | 1 | |
| 3C | POPPET | SCM415 | 1 | |
| 3B | POPPET | SKD6 | 1 | |
| 3A | POPPET | SCM415 | 2 | |
| 2C | BONNET | SS400 | 1 | |
| 2B | BONNET | SS400 | 1 | |
| 2A | BONNET | FC300 | 1 | |
| 1 | BODY | FC300 | 1 | |
| 品番 NO. | 部品名 NAME OF PARTS | 材質 MATERIALS | 数量 REQ'D NO. | 備考 REMARKS |

| | | | |
|---|---|---|---|
| 最高使用圧力 MAX.WORKING PRESSURE | 32 MPa | 承認 APPROVED | K.ITO |
| モレ検査圧力 SEAT TEST PRESSURE | 2, 32 MPa | 検図 CHECKED | T.ASAMI |
| 耐圧検査圧力 SHELL TEST PRESSURE | 48 MPa | 製図 DRAWN | MORITA |

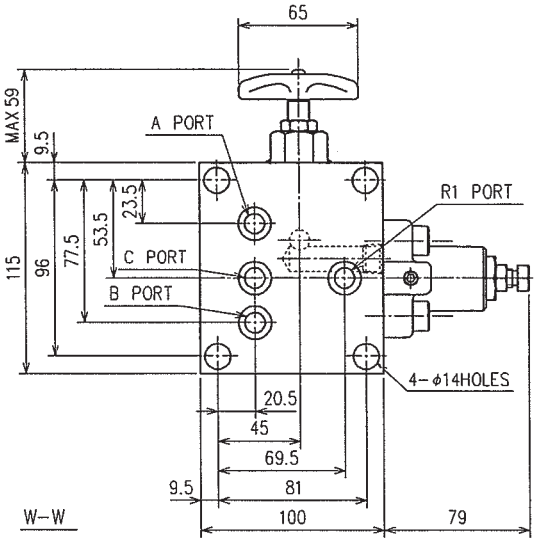名称 NAME: GASKET TYPE COMBINATION VALVE

形式 MODEL NO.: COVKM-G-RSCC-11

HIROSE VALVE INDUSTRY CO.,LTD.

| 日付 DATE | 図番 DRAWING NO. | |
|---|---|---|
| 1996, 3,29 | ES-9655 | 3 |

5-11-4