Model CI



Features

No Cold Worked Surfaces — All Surfaces Ground or Machined, Not Sheared or Punched.

Cosasco® Coupons are specially made for corrosion and erosion studies and are manufactured to the most demanding standards. Generally, coupons should be of an alloy the same as, or similar in chemical composition to the pipeline or vessel that is being monitored. Cosasco will manufacture Cosasco coupons in any configuration, and from any material, whether provided by Cosasco or by the customer. Evaluation of welds can be made by utilizing coupons with weld beads applied, or evaluation of scale by use of strip scale coupons.

All coupons are certified in writing to show serial numbers and weights (furnished in grams to four decimal points). Cosasco coupons are individually packaged in vapor phase inhibited envelopes with a corrosion free shelf life of one year. Coupons are sealed and shipped in sets of 10 in a poly bag.

Cosasco standard coupons are furnished with a ground surface finish or directional sanded surface finish. All coupons are furnished "as machined" unless otherwise specified. The exception is Cosasco standard G10180 which is annealed.

Strip and ladder type coupons, which are generally used in pairs, are furnished with nylon insulation. Hardware for these coupons is furnished with the coupon holders.

Teflon insulation and hardware for disc type coupons are provided with their compatible coupon holders.



STANDARD COUPONS

3" Strip Coupons: Cosasco's standard coupon, measuring 2-7/8" \times 1/8" (7.3 \times 2.2 \times 0.32cm) with two mounting holes, can be utilized for varied studies. The exposed surface area is 5.2 sq. in. (33.5 sq. cm.).

6" Strip Coupons: $6" \times 7/8" \times 1/8"$ (15.2 x 2.2 x 0.32cm) with two mounting holes, this coupon is used when a larger exposed area is required. The exposed surface area is 11.4 sq. in. (73.5 sq. cm.).

Ladder Strip Coupons: These coupons are used in sets at intervals in the line. They measure $2" \times 7/8" \times 1/8"$ (5.1 x 2.2 x 0.32cm) with two mounting holes. The exposed surface area is 3.4 sq. in. (21.9 sq. cm.).

Flush Disc Coupons: Generally used in applications where the coupon cannot extend into the pipe to interfere with the flow or pigging operations. A circular coupon with a diameter a 1.25", a thickness of 0.125" (3.18 x 0.32 cm), and one mounting hole ID 0.312" (0.792 cm.). The hole is countersunk, and uses a flathead, stainless steel screw, insulating washer and insulating disc for mounting. The exposed surface area is 2.5 sq. in. (16.1 sq. cm.)

Multiple Disc Coupons: A circular coupon with a diameter a 1.25", thickness of 0.125" and one 0.50 mounting hole (3.18 x 0.318 x 1.2 cm). There coupons can be used only in conjunction with Multiple Disc Coupon Holders. The exposed surface area is 2.3 sq. in. (14.8 sq. cm.).

3" Strip Scale Coupons: This coupon has the same dimensions as shown for the 3" Strip Coupon, however it is drilled with a series of different sized holes (.063, .094, .125, .187, .25 & .312) to collect scale deposits. The exposed surface area is 5.25 sq.in. (33.9 sq. cm.).



Coupons shown rotated 90 from normal position. See coupon holder pages for sizing.

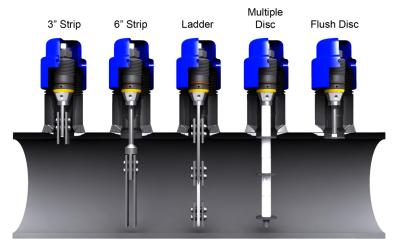


FIG.1

Ordering Information

CI	Insulated Coupon Assembly							
	Code	Coupon Type						
	S3	3" Strip Coupon						
	S6	6" Strip Coupon						
	L	Ladder Strip Coupon Flush Disc Coupon						
	D							
	MD	Multiple Disc Coupon						
	SC	3" Strip Scale Cou						
		Code All						
			8 Mild S					
			Stainle:					
			Stainle					
				ess Steel				
			Stainle					
				ess Steel				
			Stainle Stainle					
) Stainle					
			Code	Surface Fi	nich			
		 	0	Ground	111511			
			1	Directional S	Sandad			
l			2	Glass Bead E				
			i –		Insulators			
							/	
1				0	Standard Nylo			
				1			mic Insulators (1475°F) Not applicable for disc coupons	
				2 3	Teflon [®] Insula	•	, =	
				٠			ption for disc coupons	
						Handling		
						Pre-weighe		
					1 (Jn-weighed	I	
						Code	Special Options	
						0	No Special Option	
						1	Stamp Serial Number on Both Sides	

Cosasco

11841 Smith Avenue Santa Fe Springs, CA 90670, USA Tel: 1-562-949-0123

Email: sales@cosasco.com
Web Site: www.cosasco.com

 $\ensuremath{\mathbb{C}}$ Rohrback Cosasco Systems, Inc. All rights reserved

The contents of this publication are presented for information purposes only, and while effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, express or implied, regarding the products or services described wherein or their use or applicability. We reserve the right to modify or improve the designs or specifications of our products at any time without notice.

