


SECUPRO MEGASAFE
EXTREMELY TOUGH. EXTREMELY STRONG.

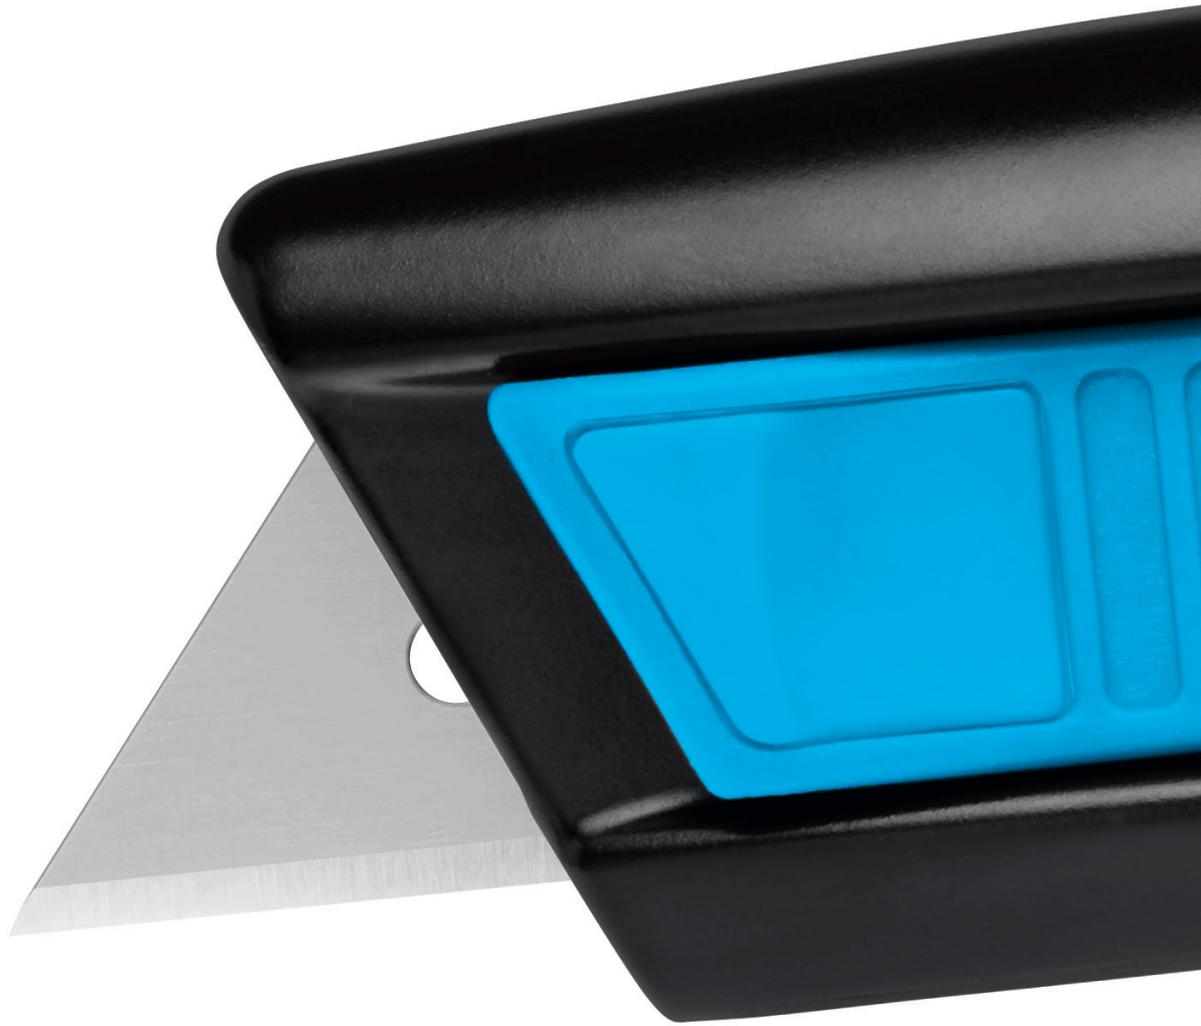

ENJOY SAFETY
MADE IN SOLINGEN

martor

SECUPRO MEGASAFE

NO. 116001



Original size



Robust handle

The body of our top quality SECUPRO MEGASAFE is 100% aluminium. And ultimately, 100% robust. You can master all manner of standard cutting materials with this cutter. Even multi-layered ones.



Change without opening

Blade change is easy and safe. Simply push down on the back end of the rocker device located on the topside of the cutter, and push the slider completely forward. The blade is ready for changing.



Perfect handling

The lightly rounded handle fits particularly well in your hand. Your thumb doesn't get a raw deal either: soft grip on the the slider makes for a pleasant, slip-resistant resting pad.



Double-sided slider

With the right hand? With the left hand? No need to ask this question! The SECUPRO MEGASAFE is fitted with a slider that's accessible from both sides. Choose for yourself!



Double-edged blade

Before you need to change the quality blade, you have the chance to turn it over once. Usage time of the blade is doubled and fatigue is held at bay: with a simple flip of the blade, your SECUPRO MEGASAFE will cut like new.

Quality that's visible.

You would like to have a safety knife with a large blade extension? Or are you looking for a worthy replacement for either OPTISAFE or MAXISAFE? In both cases, the SECUPRO MEGA-SAFE is your top choice. Thanks to a cutting depth of up to 20 mm, this cutter doesn't shy away from a challenge. And no matter your task, safety is always guaranteed; the fully automatic blade retraction functions even when you decide to not fully extend the blade.

PRODUCT FEATURES

Technical features

	Very high safety		Tool-less blade change
	Very abrasion resistant		Ergonomic
	2-times usable blade		Extended blade length
	Cutting depth 20		Soft-grip
	For right and left hander		Printable for promotional purposes

Main cutting materials

	Cardboard: up to 3-ply		Plastic strapping band
	Bagged goods		Slabbing material off a roll
	Wrapping, stretch, and shrink foil		Tape

Installed blade

	NO. 99	0.63 mm, deep-edged
--	---------------	---------------------




Optional blade

	NO. 199	0.63 mm, deep-edged, stainless
	NO. 60099	0.63 mm, rounded blade tips, deep-edged
	NO. 98	0.63 mm


Certificates and awards



Application



Safety technology



Fully automatic blade retraction – a very high degree of safety

The fully automatic blade retraction of the SECUPRO MEGA-SAFE guarantees a very high degree of safety from cut injuries. The blade withdraws into the handle immediately after leaving the material being cut. Even if the slider is still being activated.

YOU CAN FEEL THE QUALITY.

SECUPRO MEGASAFE

- › High-quality aluminium handle
- › Fully automatic blade retraction
- › Notable cutting depth (cuts up to 3-ply cartons)
- › Very easy blade change
- › TÜV-certified

PRODUCT DETAILS

Order No.	NO. 116001.02
Packaging unit	1 in single unit box (10 in multipack)
Knife size (L x W x H)	153 x 26 x 38 mm
Main material	Aluminium
Weight	140.0 g
Cutting depth	20.1 mm
Spare blade Packaging unit Size (L x W x Thickness)	NO. 99.70 (10 in dispenser) 60 x 19 x 0.63 mm
Certified	GS certificate NO. S 60040423
Accessories	
BELT HOLSTER M WITH CLIP	 NO. 9921
USED BLADE CONTAINER	 NO. 9810
WALL MOUNT BRACKET USED BLADE CONTAINER	 NO. 9845
SAFEBOX	 NO. 108000

CONTACT AND SERVICE

What makes our cutting solutions even safer? Our advisory services! We are always on hand, to give advice, to provide you with training material, to meet with you in person if necessary.

You will find further information on our website:
www.martor.com



At a glance: the safety poster shows the most important functions and correct usage – perfect for your workplace.



From the first cut to changing the blade, our video will show you the best way to use this knife.



Everything you want to know: dimensions, properties, special features and more about our cutting tools can be found in the Technical Data Sheet.



Still have questions? You can reach our service department on [+49 212 25805-0](tel:+49212258050)